



NATIONAL POWER CORPORATION

SUPPLEMENTAL / BID BULLETIN NO. 1
to the Bid Documents for the:

**SUPPLY AND DELIVERY OF STATOR ASSEMBLY FOR VARIOUS CUMMINS
GENERATING SETS OF MQNLOD UNDER PR NO. S1-MQN25-002 / PB250123-CM00605
(PB2)**

20 FEBRUARY 2025

All prospective bidders and authorized copy holders of the Bid Documents of the above-mentioned project are hereby advised of the additional information in the Bid Documents, to wit:

PICTURES OF THE NAMEPLATES OF ITEM NOS. 1, 2, & 3:

"Please see attached Annex A"

All other terms and conditions shall remain the same.

For the information and guidance of all authorized copy holders of the Bid Documents and prospective bidders.

For the Bids and Awards Committee:


LARRY I. SABELLINA

Vice President, Mindanao Generation Group,
and Chairman, Bids and Awards Committee




NATIONAL POWER CORPORATION

Gabriel Y. Itchon Building
Senator Miriam P. Defensor-Santiago Avenue (formerly BIR Road)
corner Quezon Avenue, Diliman, Quezon City 1100, Philippines
Tel. Nos. (632) 8921-3541 to 80 • Fax No. (632) 8921-2468
Website: www.napocor.gov.ph



ITEM NO. 1

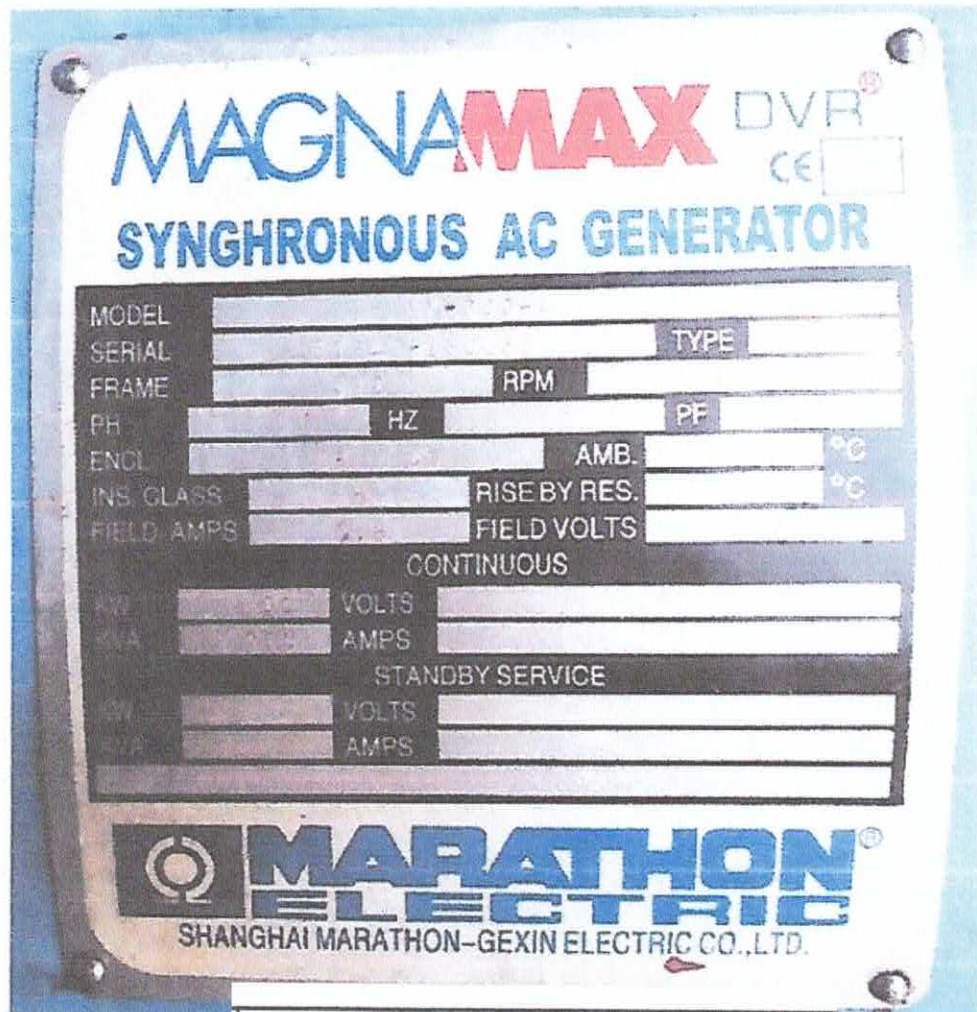

ALTERNATOR / GENERATOR SPECIFICATION	
Make	: Stamford
Model	: MX-600-4
Serial No.	: 57243-160025
Voltage	: 480
Frequency	: 60
Power factor	: 0.8
Current	: -
Phase	: 902.11
Speed	: 3
KVA rating	: 1800
	: 750

ITEM NO. 2

STAMFORD

SERIAL NUMBER	X15G282713	DUTY	CONTINUOUS (S1)
FRAME/CORE	HC.1B34G1	EXCITATION VOLTAGE	58.0
BASE RATING kVA	1000.0(BR)	EXCITATION CURRENT	3.4
BASE RATING kW	800.0	INSULATION CLASS	CLASS H
AMPERES BR	1202.8	AMBIENT TEMPERATURE	40
FREQUENCY	60 HERTZ	TEMPERATURE RISE	155 K
RPM	1800	THERMAL CLASSIFICATION	F
VOLTAGE	480	ENCLOSURE	3
PHASE	3	STATOR WINDING	115
PF	0.80	STATOR CONNECTION	3-2-2-2-2-2-2

Customer Name: Akxa China

BS 5000, PART3 IEC 60034-1 ISO 8528-3
NEMAMG 1-32 BS EN 60034-1

CE

UL 1446 Info.
STAMFORD
UL File: OBJVZ E195471
Designation: H UL1446
Factory ID Code: XJ

LR 11305
ENCLOSURE TYPE: DNGD

ITEM NO. 3

Leroy-Somer

LSA 46.3L10 C 6/4 IP23

N°: 718242 001 Date: 2010/09-05

1800 rpm 60 Hz Weight: 888 kg

PF: 0.8 Th. class: H/H Altitude: < 1000m

AVR excitation: 0510C AREP

Excitation full load: 37.6 V / 2.42 A

480 V/40 °C at no load: 0.7 A

OE bearing

NDE bearing: 6315 2RS/C3

CE

RATINGS

Voltage	480	V
Phase	3	
Conn.	Δ	
Cont.	406	kVA
on	325	kW
40 °C	488	A
Std by		kVA
PR		kW
		A

IEC 60034-1 & 5, / ISO 8528-3, / NEMA MG1-32 & 33.

Moteurs Leroy-Somer - Boulevard Marcellin Leroy,
CS 10015 - 16915 Angoulême Cedex 9 - France

LSA 000-T-002